
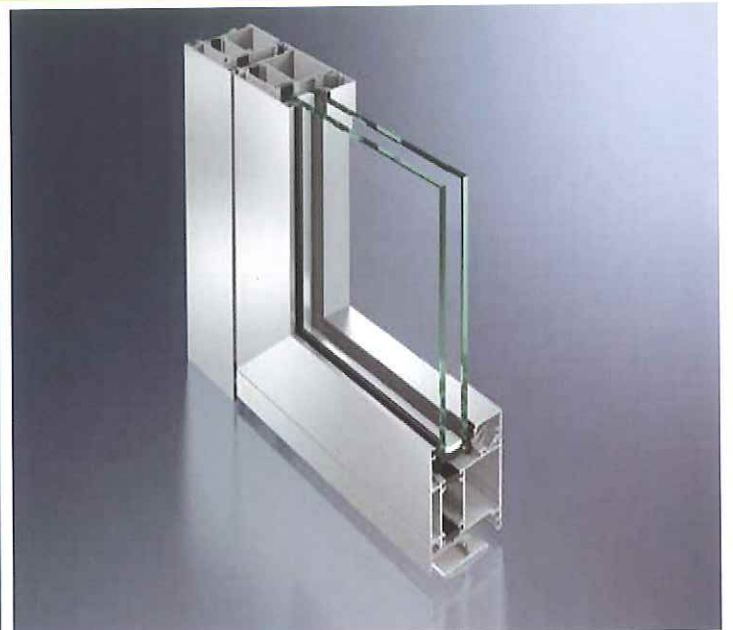



旭格ADS 65 HD

铝合金门系统
Aluminium door system

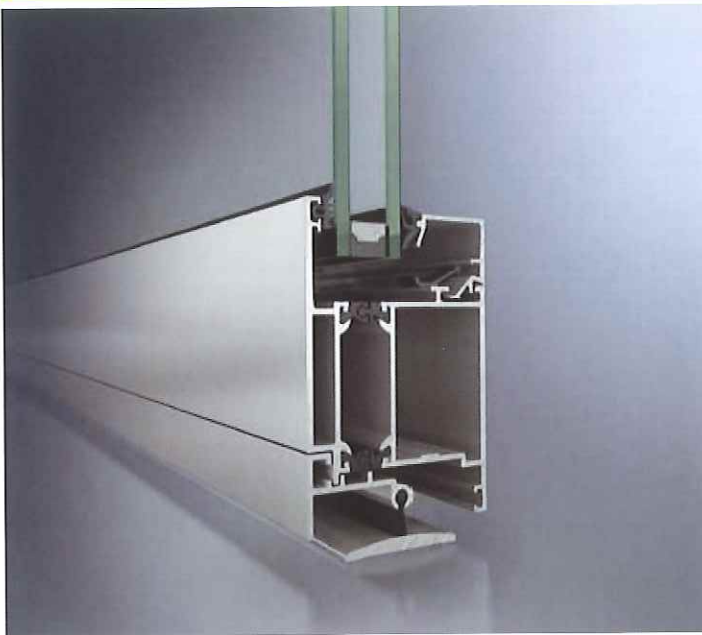

为大型建筑项目提供超大尺寸的旭格ADS 65 HD (高承重)门系统以其纤细的可视面宽度为幕墙打造引人入胜的视觉体验。该系统结构极其坚固，为高频率使用建筑提供极大的开启宽度。系统结构厚度为65 mm，通过高度可达3,000 mm，提供多种应用可能和设计选择。
经典的设计与旭格幕墙系统及窗系统互为协调，使各系统完美组合在一起。

The Schüco Door ADS 65 HD (Heavy Duty), also available as oversize units for large architectural projects, creates a striking feature of the façade with its slim face width. It has a particularly robust design and offers large opening widths for busy buildings. The basic depth of 65 mm and the clearance height of up to 3,000 mm allow a wide range of applications and design options. This classic, timeless design perfectly coordinates with the Schüco façade and window systems for an outstanding continuation.

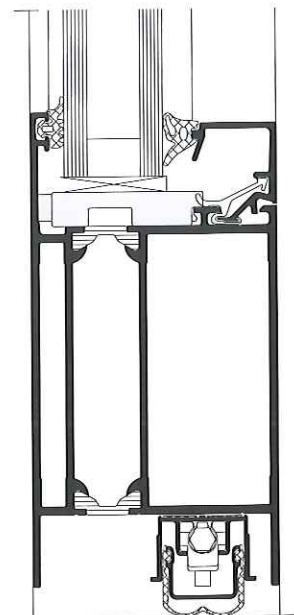

旭格ADS 65 HD门系统，
下框节点，比例 1:2
Schüco Door ADS 65 HD,
Sill, Scale 1:2

旭格ADS 65 HD门系统

铝合金门系统

Aluminium door system



旭格铝合金
门系统ADS 65 HD
Schüco Aluminium
door System ADS 65 HD

凭借极其坚固的设计，旭格ADS 65 HD门系统能承受极高的使用频率。

- 防盗等级达到WK3 (RC3)
- 开启宽度达到2,800 mm (双扇)
- 舒适的通过高度
可达3,000 mm
- 最大扇重200 kg
- 突出设计的柱式合页
- 可选基座型材或连贯扇型材

可选性能

- 自动门密封
- 无障碍出入解决方案
- 隐藏式合页
- 包扇嵌板
- 门合页经过1,000,000次连续负荷测试，符合DIN EN 12400规定
- 应急五金件
- 逃生门安全装置

The particularly robust design of Schüco ADS 65 HD doors accommodates heavy loading at busy entrances and exits.

- Burglar-resistant up to WK3 (RC3)
- Opening width up to 2,800 mm (double-leaf)
- Generous clearance heights of up to 3,000mm
- Max. leaf weight 200 kg
- Barrel hinge with reinforced design
- Choice of sill rail profile or continuous leaf profile

Optional

- Automatic door seal
- Easy-access solutions
- Concealed hinges
- Leaf-enclosing infill
- Door hinges tested in 1,000,000 cycles for continuous loading in accordance with DIN EN 12400
- Emergency fittings
- Emergency exit switch

技术数据 Technical data

检测 Test	标准 Standard	值 Value
隔热 Thermal insulation	DIN EN ISO 1077-2	2,3 - 3,1 W/(m²K)
防盗 Burglar resistance	DIN EN 1627	WK3 (RC3)
空气渗透性 Air permeability	DIN EN 12207	等级 2 Class 2
防暴雨密封性能 Watertightness	DIN EN 12208	至等级 5A to Class 5A
防风性 Wind resistance	DIN EN 12210 ¹	至等级 C3 to Class C3
机械应力 Mechanical loading	DIN EN 13115	至等级 3 to Class 3

¹挠度根据型材而定 The amount of deflection will depend on the profile

旭格国际集团

Schüco International KG

www.schueco.com

SCHÜCO